



MOTOR OILS AND GREASES FOR GARDEN EOUIPMENT

DYNAMAX has created a series of oils that make maintenance and trouble-free operation of garden equipment simple and affordable for everyone.

A wide range of quality products quarantees proper selection of lubricant and oil for four-stroke or two-stroke engines for garden machinery, adhesive oil for chainsaws against jamming and damage, transmission and hydraulic oils and also engine oils suitable for motorcycles, marine engines, snowmobiles, cutters or emergency generators.

Oils and lubricants are suitable not only for older types of garden and forestry technology, but also for the latest high-performance and highly loaded machines with a guarantee of optimal performance, efficiency and extended service life. Meet our wide range of DYNAMAX oils for garden equipment.



CLASSIFICATION OF OILS FOR SPARK-IGNITION TWO-STROKE ENGINES

Engine oils for two-stroke engines of motorcycles. mopeds, scooters, lawnmowers, brushcutters and chainsaws are classified most often according to the API (USA) and JASO (Japan) standards:

APITA/JASO FA for mopeds and small engines (light load) APITB/JASOFB oils for scooters and other medium-duty engines 50 to 200 cc

API TC / JASO FC oils for medium

to high load engines

JASO FD

with low smoke oils for high-performance engines with low smoke and much higher cleaning requirements than FC

ISO SPECIFICATIONS

The ISO specifications were created in the 1990s as a supplement to the Japanese JASO specifications for two-stroke engines. Each ISO specification is identical to the corresponding JASO specification, but

an additional 3-hour test for the detergent (cleaning) abilities of the oil is required

ISO-L-EGB Compliant with JASO FB

+ cleaning ability test

Compliant with JASO FC ISO-L-EGC + cleaning ability test

ISO-L-EGD Compliant with JASO FD

+ cleaning ability test

THE SERVICE RATING OF 4-STROKE ENGINE OILS IS GOVERNED BY THE AMERICAN PETROLEUM INSTITUTE (API).

This classification distinguishes motor oils according to the type of engine into: gasoline (petrol) marked with the letter "S" (Service) and diesel [diesel] marked with the letter "C" [Commercial].

The power level is expressed for the given engine type by the next letter (from "A" above). The further this letter is in the alphabet, the higher the quality of the oil. As a rule, if the specification "S" is listed first, the oil is intended primarily for gasoline engines, if "C" is for diesel engines, E.g.: SJ/CF - oil primarily for gasoline engines, also suitable for diesel engines; CE/SG - oil primarily for diesel engines, also suitable for gasoline engines.

PERFORMANCE CLASSES FOR PETROL (GASOLINE) ENGINES USED IN GARDEN TECHNOLOGY

SJ oils for gasoline engines take into account the strictest emission limits and demands for fuel economy. For engines manufactured in 2001 and older. SL oils surpassing API SJ with increased fuel economy and the possibility of extended replacement periods. Usable in all vehicles equipped with American gasoline engines.

SM oils surpassing API SL with increased oxidation stability, higher protection against wear and deposits. Indicated validity since 2004.


SN oils surpassing API SM with increased piston protection against high temperatures, better sludge control, seal compatibility. It guarantees improved fuel economy, protection of the emission control system and protection of engines powered by fuels containing ethanol up to E85. Indicated validity from 2010.


PERFORMANCE CLASSES FOR DIESEL ENGINES **USED IN GARDEN TECHNOLOGY**

CE oils for powerful, highly loaded, high-speed, turbocharged engines.

CF oils for turbocharged, high-load engines with indirect injection as well as other engines, including those that burn fuel with a sulfur content above

Table of recommended SAE oils according to outside temperatures



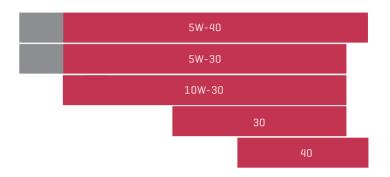



MAIN PRINCIPLES WHEN CHOOSING MOTOR OIL FOR GARDEN EQUIPMENT:

- according to the so-called viscosity grades
- a specific change time/interval is recommended. This is defined by the garden equipment manufacturer, in general the oil should be changed according to the period of use or runtime hours. Under normal conditions, change is recommended at least once a year.
- **4.** If you are changing a low performance specification oil to a high performance oil,





> MOTOR OILS AND GREASES FOR 4-STROKE ENGINES OF GARDEN EQUIPMENT

DYNAMAX has created a series of oils that are used for the maintenance and trouble-free operation of garden equipment simple and accessible to everyone. Engine oil for four-stroke or two-stroke engines for garden machines. adhesive oil for chainsaws against jamming and damage and, finally, motor oil suitable for motorcycles, boat engines and snowmobiles.

DYNAMAX M4T SUPER 30





DYNAMAX M4T SUPER 5W-40

Petrol intend and di suitab Has very good resistance to oxidation, protects against corrosion, prevents the formation of deposits.

VISCOSITY GRADE: SAE 30 PERFORMANCE PROFILE: API SJ/CF

leum oil produced by modern technology	ART. NR.	P
ded for lubrication of four-stroke petrol	500712	
liesel engines of garden equipment. Also	500713	
ole for engines with a catalytic converter.	503250	
ery good resistance to oxidation, protects		

Year-round synthetic motor oil for 4-stroke petrol and diesel engines of modern garden technology such as snow blowers, mowers, garden tractors, but also for passenger cars, supercharged and

non-supercharged. Very effective in engines operating at low temperatures.

VISCOSITY GRADE: SAE 5W-40

PERFORMANCE PROFILE: API SM/CF; ACEA A3/B4

DYNAMAX M4T SUPER 10W-30



High quality petroleum oil produced by modern technology, containing high-content ingredients. Forms a permanent lubricating film resistant to mechanical load even at high temperatures. Designed for four-stroke engines of modern garden machinery. Also suitable for petrol engines with and without a catalyst.

VISCOSITY GRADE: SAE 10W-30 PERFORMANCE PROFILE: API SG/CD

ART. NR.	PACKAGING
501840	1L
502400	60L
502500	209L

DYNAMAX M4T SUPER 5W-30





Synthetic motor oil made for garden and agricultural machines. Designed for year-round use in mowers, tractors, cultivators, emergency generators, sweepers and high-pressure cleaners, winter cutters equipped with gasoline or diesel 4-stroke engines, air or water cooled, equipped with or without turbo.

VISCOSITY GRADE: SAE 5W-30 PERFORMANCE PROFILE: API SN/CF

ART. NR.	PACKAGING
503302	1L

DYNAMAX LTA 2M



500ML

1L

60L

ART. NR. PACKAGING

1L

500704



High quality multipurpose grease with excellent extreme pressure and antiwear properties, produced on the basis of mineral oil with a high viscosity index and using a lithium thickener. Contains solid anti-friction additives. Developed for rolling and sliding bearings, hinges and sliding surfaces, which are widely used in industrial and transport equipment.

PERFORMANCE PROFILE: DIN 51502/51825 **SPECIFICATIONS: NLGI 2**

ART. NR.	PACKAGI
635790	100MI

DYNAMAX LTA 2EP





Multifunctional lubricant made on the basis of mineral oil using lithium soap. Suitable for use in rotary mowers, chainsaws and brush cutters. Developed for long-term operation in units and bearings exposed to extreme impacts such as high temperatures and speeds. Characterized by particularly high antioxidant properties.

PERFORMANCE PROFILE: DIN 51502/51825 **SPECIFICATIONS: NLGI 2**

ART. NR. PACKAGING 635789 100ML



1. HIGHEST GRADE GARDEN MOTOR OILS AND GREASES

DYNAMAX M4T SUPER 30
DYNAMAX M4T SUPER 5W-30
DYNAMAX M4T SUPER 10W-30
DYNAMAX M4T SUPER 5W-40
DYNAMAX LTA 2M
DYNAMAX LTA 2EP

2. ADDITIVES FOR FUEL AND OIL SYSTEMS

DYNAMAX RADIATOR SYSTEM CLEANER
DYNAMAX RADIATOR STOP LEAK
DYNAMAX E10 GASOLINE ADDITIVE
DYNAMAX GASOLINE SYSTEM CLEAN & PROTECT
DYNAMAX VALVE & INJECTOR CLEANER
DYNAMAX GASOLINE WINTER ADDITIVE
DYNAMAX ALL-SEASON DIESEL ADDITIVE
DYNAMAX DIESEL BACTERICIDE
DYNAMAX OIL STOP LEAK
DYNAMAX OIL SYSTEM CLEANER
DYNAMAX HYDRAULIC LIFTER CARE
DYNAMAX DIESEL SYSTEM CLEAN AND PROTECT

3. FOR POWER STEERING AND HYDRAULIC SYSTEMS

DYNAMAX PSF SYNTH
DYNAMAX TRACTOR PLUS TXM 10W-30
DYNAMAX PP80
DYNAMAX PP90
DYNAMAX OHHM 22
DYNAMAX OHHM 46
DYNAMAX HYPOL 80W-90 GL-4
DYNAMAX HYPOL 80W-90 GL-5
DYNAMAX HYPOL 75W-90 GL-5
DYNAMAX OHHV 46
DYNAMAX OTHP 32



4. FOR MAXIMUM BRAKING EFFECT

DYNAMAX 240 DOT3 DYNAMAX 265 DOT4

5. TO KEEP YOUR ENGINE FROM OVERHEATING

DYNAMAX DEMINERALIZED WATER
DYNAMAX COOL 11
DYNAMAX COOL 11 READYMIX -37°C
DYNAMAX COOL 12
DYNAMAX COOL 12 READYMIX -37°C
DYNAMAX COOL ULTRA 12 EVO

6. CAR COSMETICS FOR REGULAR MAINTENANCE


DYNAMAX DXI2 UNIVERSAL CLEANER
DYNAMAX DXM3 MOTOR CLEANER
DYNAMAX DXT2 SILICONE SPRAY
DYNAMAX DXT3 CONTACT SPRAY
DYNAMAX DXT4 MULTISPRAY
DYNAMAX DXT7 START-SPRAY
DYNAMAX DXT14 COPPER SPRAY
DYNAMAX DXC1 BRAKE CLEANER
DYNAMAX DXC10 CARBURETTOR CLEANER
DYNAMAX MOTOFORCE CHAIN CLEANER
DYNAMAX MOTOFORCE CHAIN LUBE
DYNAMAX DXG1 GLASS CLEANER
DYNAMAX DXG1 GLASS CLEANER
DYNAMAX DXC9 INDUSTRIAL HAND CLEANER
DYNAMAX DXC9 INDUSTRIAL HAND CLEANER

7. CAR BATTERIES WITH AN EXTENDED WARRANTY

DYNAMAX ENERGY BLUELINE 44; 55; 62 DYNAMAX ENERGY BLUELINE 74; 95 DYNAMAX ENERGY BLUELINE 140HD DYNAMAX ENERGY BLUELINE 180HD





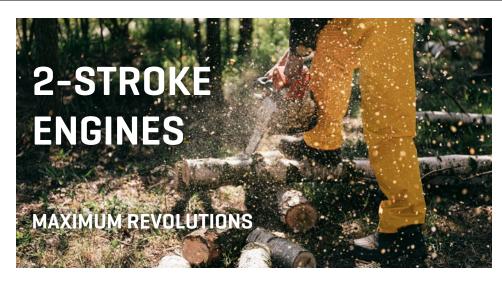

> MOTOR OILS AND GREASES FOR 2-STROKE ENGINES OF GARDEN EQUIPMENT

DYNAMAX has created a series of oils that are used for the maintenance and trouble-free operation of garden equipment simple and accessible to everyone. Engine oil for four-stroke or two-stroke engines for garden machines, adhesive oil for chainsaws against jamming and damage and, finally, motor oil suitable for motorcycles, boat engines and snowmobiles.

DYNAMAX M2T SUPER





Motor oil fo with additive for both dir tion system mended dilution with petrol 1:50.

VISCOSITY GRADE: SAE 40/50 PERFORMANCE PROFILE: API TC; JASO FC

r 2T engines of garden equipment	ART. NR.	PACKAG
es to improve oil lubricity. Suitable	500169	250M
rect oil injection and for lubrica-	500170	500M
ns with premixed mixture. Recom-	500171	1L
ution with petrol 1:50.	502489	601

DYNAMAX M2T SUPER HP



Engine oil for 2T garden equipment engines based on mineral base oil with anti-wear additives to improve properties that help prolong engine life. Has excellent miscibility with gasoline, forming a homogeneous and stable mixture. Recommended dilution: 1:50.

PERFORMANCE PROFILE: API TC: JASO FD

ART. NR.	PACKAGING
503070	100ML
500823	250ML
502300	1L
502483	60L

DYNAMAX CHAIN SAW OIL 100





Mineral oil designed for loss lubrication of chainsaws. Prevents them getting damaged or iammed. Enriched by a special ingredient that ensures better oil adhension to the chain. thus minimizing the loss of oil. Not suitable for lubrication of engines.

ART. NR. PACKAGING 501506 1L 501507 4L 501739 10L 502497 60L

VISCOSITY GRADE: ISO VG 100

DYNAMAX 2T OUTBOARD





High performance ashless 2-stroke engine oil to meet the most critical requirements of the latest outboard and snow mobile engines. Exceeds the stringent performance requirements of the National Marine Manufacturers Association's specification NMMA TC-W3®.

PACKAGING
1L
10L
60L

PERFORMANCE PROFILE: NMMA TC-W3

DYNAMAX LTA 2M





High quality multipurpose grease with excellent extreme pressure and antiwear properties, produced on the basis of mineral oil with a high viscosity index and using a lithium thickener. Contains solid anti-friction additives. Developed for rolling and sliding bearings, hinges and sliding surfaces, which are widely used in industrial and transport equipment.

PERFORMANCE PROFILE: DIN 51502/51825

SPECIFICATIONS: NLGI 2

ART. NR.	PACKAGIN
635790	100ML

DYNAMAX LTA 2EP





Multifunctional lubricant made on the basis of mineral oil using lithium soap. Suitable for use in rotary mowers, chainsaws and brush cutters. Developed for long-term operation in units and bearings exposed to extreme impacts such as high temperatures and speeds. Characterized by particularly high antioxidant properties.

PERFORMANCE PROFILE: DIN 51502/51825 **SPECIFICATIONS: NLGI 2**

ART, NR. PACKAGING 635789 100ML











> FOR THE RELIABLE OPERATION OF HYDRAULIC MECHANISMS

Agricultural machinery and equipment require high-quality engine and hydraulic oils that will provide support for the expended power and long durability of the engine and the entire mechanism. DYNAMAX agricultural machinery oils are composed of carefully selected components and represent the answer to the question of how to choose a suitable engine or hydraulic oil for a tractor, combine harvester or other agricultural machine.

DYNAMAX PSF SYNTH





Green synthetic hydraulic oil developed for highly stressed power steering systems, centralized hydraulic systems and shock absorbers which can reach permanent oil temperatures up to approximately 140 °C. The unique additive package ensures optimal temperature stability, high oxidation stability,

503074

ART. NR. PACKAGING

PERFORMANCE PROFILE: ISO 7308; DIN 51 524/3

SPECIFICATIONS: BIMW; FORD; HYUNDAJKIA; OPEL; PORSCHE; TOYOTA; VW; CITROEN; LAND ROVER;
RENAULT: MB: SAAB: VOLVO: ZF TE-M: OZK

DYNAMAX TRACTOR PLUS TXM 10W-30





Premium high quality universal tractor transmission oil (UTTO) developed for lubrication of combined gear/transmission and hydraulic systems of tractors and other agricultural and construction machinery. Suitable for use in "wet brakes" in clutches and auxiliary drives.

ART. NR. PACKAGIN 500124 20L 500125 209L

PEFFRMANCE PROFILE: API GL-4, DIN 51524-3 [HYLP-D]
SPECIFICATIONS: ALLISON C-4; CATERPILLAR TO-2; JOHN DEERE J20 C, JOHN DEERE J21 A; ZF TE-ML
03E/17E/05F/21F; ZF TE-ML 06K/06R/06S

DYNAMAX PP 80W





Mineral Gear Oil designed for the lubrication of mechanical gear units and final drives (except hypoid), cars and mobile devices. Suitable for gearboxes of vehiclesTATRA 148 and 815, Praga V3S and S5T.

VISCOSITY GRADE: SAE 80W PERFORMANCE PROFILE: API GL-4

ART. NR.	PACKAGING
501932	1L
500188	4L
500189	10L
500205	20L
502464	60L
502269	209L

DYNAMAX PP 90





Mineral Gear Oil designed for the lubrication of mechanical gear units and final drives (except hypoid), cars and mobile devices. Suitable for gear units of vehicles AVIA 21 and 31, LIAZ, KAROSA, IKARUS 280.

VISCOSITY GRADE: SAE 90
PERFORMANCE PROFILE: API GL-4

ART. NR.	PACKAGING
502010	1L
500191	4L
500192	10L
500193	20L
502391	60L
502390	209L

DYNAMAX OHHM 22





Designed for hydraulic wood splitters and other hydraulic mechanisms working all year round in unprotected conditions, even at very low temperatures. Hydrotreated petroleum oil refined with additives to improve oxidative stability, anti-corrosion and anti-abrasion properties. Can be used all year round and is compatible with most hydraulic oils.

VISCOSITY GRADE: ISO VG 22
PERFORMANCE PROFILE: HM (ISO-L-HM); HLP (DIN 51 524/2)
SPECIFICATIONS: AFNOR NF E 48-603 (HM); DENISON HF-0/HF-2;
SPERRY VICKERS I-286-S; AFNOR NF E 48-691 (WET), AFNOR
NFE 48-690 (DRY)

ART. NR.	PACKAGIN
500717	4L
503251	60I

DYNAMAX OHHM 46





Hydraulic oil based on mineral base oil with special additives to provide excellent thermo-oxidant, anticorrosion and anti-wear qualities to prolong the life of the components.

VISCOSITY GRADE: ISO VG 46
PERFORMANCE PROFILE: HM (ISO-L-HM); HLP (DIN 51 524/2)
SPECIFICATIONS: DENISON HYDRAULICS HFO/HF2; CINCINNATI
MACHINE P-70; BOSCH REXROTH RE 90220-01

ART. NR.	PACKAGIN
500195	10L
500201	20L
502411	60L
501889	209L



500196

500206

500194

500204

502410

502444

1L

4L

10L

20L

60L

209L

DYNAMAX HYPOL 80W90 GL-4





Mineral Gear oil with excellent lubricating, anticorrosion and antioxidant properties. Especially recommended for the lubrication of mechanical gear units and drive axles of passenger cars and trucks, construction and agricultural machinery for which a performance level API GL4 is required.

VISCOSITY GRADE: SAE 80W-90
PERFORMANCE PROFILE: API GL-4
SPECIFICATIONS: AUTOSAN S. A.; EATON TRUCK COMPONENTS S.A.

DYNAMAX OTHP 3	,
----------------	---





Hydraulic oil based on mineral base oil with special additives to provide excellent thermo-oxidant, anticorrosion and anti-wear properties. Designed to use in automatic transmissions as well as steering and brake boosters. Also suitable for use in hydrodynamic systems.

VISCOSITY GRADE: ISO VG 32
PERFORMANCE PROFILE: GM C 2; HLP (DIN 51524/2)

PERIO

DYNAMAX HYPOL 80W90 GL-5





Mineral Gear oil with excellent lubricating, anticorrosion and antioxidant properties. Especially recommended for lubrication of mechanical gear units and drive axles of passenger cars and trucks, construction and agricultural machinery for which a performance level API GL5 is required.

VISCOSITY GRADE: SAE 80W-90
PERFORMANCE PROFILE: API GL-5
SPECIFICATIONS: MAN 342 M1; MB 235.0; MIL-L-2105D; VOITH
3.325-339; VOLVO 97310; ZF TE-ML 08/07A/21A; ZF TE-ML

ART. NR.	PACKAGING
501626	1L
501823	20L
502495	60L
502482	209L

ART. NR. PACKAGING

1L

4L

20L

60L

209L

501624

501625

501724

501933

501940

DYNAMAX HYPOL 75W90 GL-5





Automotive gear oil based on synthetic technology assuring low friction and peak power. Ccontains special additives to enhance corrosion protection. Recommended for the lubrication of mechanical gear units of vehicles and drive axles for which a performance level API GLS is required.

ART. NR.	PACKAGIN
501623	1L
501939	20L
502496	60L
502034	209L

VISCOSITY GRADE: SAE 75W-90
PERFORMANCE PROFILE: API GL-5/MT-1

SPECIFICATIONS: MAN 341 TYPE E3/3343 TYPE S/342 TYPE M3/S1; MB 235.8/235.0/235.72; MAN 341 TYPE Z2/342 TYPE M2; MIL-1-21050/MIL-PRF-2105E; SCANIA STO 1:0/STO 2:0A FS; ZF TE-ML 02B, 05B, 07A, 08, 12B, 12L, 12N; ZF TE-ML 05A, 12E, 16B, 19B, 21A; ZF TE-ML 16F, 17B, 19C, 21B

DYNAMAX OHHV 46





Hydraulic oil based on mineral base oil with special additives to provide excellent thermo-oxidant, anticorrosion and anti-wear qualities. In addition has a high and stable viscosity index.

VISCOSITY GRADE: ISO VG 46
PERFORMANCE PROFILE: HV (ISO-L-HV); HVLP (DIN 51 524/3)
SPECIFICATIONS: AFNOR NF E 48-603 (HV); CINCINNATI-MACHIN
P-70; DENISON HF-0/HF-2; SPERRY VICKERS M-2950-S/I-
286-S; STUPEŇ ČISTOTY PODĽA NAS 1638-8

ART. NR.	PACKAGING
502460	20L
502531	60L
502530	209L



> COOLANTS FOR 4-STROKE ENGINES OF GARDEN EQUIPMENT

DYNAMAX coolants guarantee year-round protection of the cooling system of cars or motorcycles. The individual components of the cooling system can therefore withstand frost and high temperatures without any problems. Answers to the questions of how to choose a coolant or which antifreeze is the best are solved in a second thanks to DYNAMAX coolants.

DYNAMAX COOL 11





Cooling liquid based on monoethylene glycol and anti-corrosion additives. Suitable for cooling systems of internal combustion engines made of light alloys. Does not contain nitrites, amines and phosphates.

APPROVAL: VW 774 C; ASTM D 3306

ART. NR.	PACKAGING
500019	1L
500034	3L
500109	4L
500162	10L
501964	25L
502036	60L
502037	209L

ART, NR. PACKAGING

1L

4L

5L

209L

502583

502585

502586

502741

DYNAMAX COOL 11 READYMIX -37 °C





Intended for engine coolers made of light alloys. All-year round protection of the vehicle's cooling system against frost and corrosion. Guarantees very good heat transfer. Miscible with cooling liquids based on monoethylene glycol and propylene glycol.

APPROVAL: VW 774 C: ASTM D 3306

DYNAMAX COOL ULTRA 12



Produced on the basis of monoethylene glycol with special anti-corrosion additives. Specially developed for modern aluminum and alloy cooling systems. Provides all year-long protection of the cooling system against frost and corrosion. In 2008 received the prestigious award for quality - Slovak Gold.

APPROVAL: VW TL 774 D-F: ASTM D 3306

ART. NR.	PACKAGING
500143	1L
500038	3L
500144	4L
500990	10L
501963	25L
502084	60L
502085	209L

DYNAMAX COOL ULTRA 12 READYMIX -37 °C



Intented for coolers of modern aluminium and cast-iron cooling systems of combustion engines. All-year round protection of the vehicle's cooling system against frost and corrosion. Guarantees very good heat transfer. Miscible with cooling liquids based on monoethylene glycol and propylene glycol.

APPROVAL: VW TL 774 D-F: ASTM D 3306

PACKAGING
1L
4L
5L
209L

DYNAMAX COOL ULTRA 12 EVO



High-quality antifreeze for the cooling systems of the most modern combustion engines. Suitable for the cooling systems of hybrid and electric vehicles. Excellent protection against overheating, freezing, corrosion, formation of deposits in the cooling system and neutralizes "hard" water with a high mineral content.

APPROVAL: VW TL 774 L (PORSCHE/VW/AUDI/ SEAT/SKODA)

ART. NR.	PACKAGIN
503263	1L
503264	4L
503265	2091

DYNAMAX DEMINERALIZED TECHNICAL WATER





Demineralized technical water intended to dilute the concentrates of DYNAMAX antifreeze screen wash, summer screen wash and DYNAMAX cooling liquids. Suitable to use in accumulators, steam irons, in photographic laboratories.

AKI. NK.	PACKAGING
500137	1L
500138	2L PET
500013	3L PET
500012	5L PET
500014	10L
500117	25L
500118	50L





> RELIABLE BATTERIES FOR GARDEN TECHNOLOGY

DYNAMAX batteries, due to their structural composition, represent exactly what every motorist is looking for in a truck, passenger car or garden tractor. A reliable battery, that ensures smooth operation and does not fail in unexpected moments. DYNAMAX batteries are characterized by high quality, which is reflected in trouble-free daily use even in adverse conditions.

PASSENGER CARS I PKW



BATTERIES ARE MAINTENANCE-FREE
OPTIMAL PRICE-PERFORMANCE RATIO
HIGHLY DURABLE AND SHOCK RESISTANT
STRONG AND RESISTANT TO ELECTROLYTE LEAKAGE

RELIABLE DURING A COLD START ENVIRONMENTALLY FRIENDLY

SAP	Туре	Capacity Ah	Ampere (EN)	Polarity	Outside dimensions in mm			Hold-down
635515	DYNAMAX ENERGY BLUELINE 44	44 Ah	360	0	210	175	175	B13
635516	DYNAMAX ENERGY BLUELINE 55	55 Ah	450	0	241	175	175	B13
635518	DYNAMAX ENERGY BLUELINE 62	62 Ah	480	0	241	175	190	B13
635519	DYNAMAX ENERGY BLUELINE 74	74 Ah	640	0	278	175	190	B13
635520	DYNAMAX ENERGY BLUELINE 95	95 Ah	720	0	354	175	190	B13

TRUCKS I LKW

EASY MAINTENANCE
OPTIMAL PRICE-PERFORMANCE RATIO
HIGHLY DURABLE AND SHOCK RESISTANT
RELIABLE DURING A COLD START
ENVIRONMENTALLY FRIENDLY



SAP		Туре	Capacity Ah	Ampere (EN)	Polarity	Outside dimensions in mm		Hold-down	
635	521	DYNAMAX ENERGY BLUELINE 140HD	140 Ah	760	3	514	189	220	B00
635	522	DYNAMAX ENERGY BLUELINE 180HD	180 Ah	950	3	514	223	220	B00

START-STOP

BATTERIES ARE MAINTENANCE-FREE
HIGHLY DURABLE AND SHOCK RESISTANT
STRONG AND RESISTANT TO ELECTROLYTE LEAKAGE
RELIABLE WITH EXCELLENT PERFORMANCE
SUITABLE FOR VEHICLES IN CONSTRUCTION INDUSTRY
ENVIRONMENTALLY FRIENDLY



SAP	Туре	Capacity Ah	Ampere (EN)	Polarity	Outside	dimension	s in mm	Hold-down
635213	DYNAMAX BLUELINE 60 EFB	60 Ah EFB	640	0	242	175	190	B13
635214	DYNAMAX BLUELINE 70 EFB	70 Ah EFB	720	0	276	175	190	B13
635215	DYNAMAX BLUELINE 70 AGM	70 Ah AGM	760	0	276	175	190	B13
635216	DYNAMAX BLUELINE 80 AGM	80 Ah AGM	800	0	315	175	190	B13
635217	DYNAMAX BLUELINE 95 AGM	95 Ah AGM	850	0	353	175	190	B13

ASIA

BATTERIES ARE MAINTENANCE-FREE
HIGHLY DURABLE AND SHOCK RESISTANT
STRONG AND RESISTANT TO ELECTROLYTE LEAKAGE
RELIABLE WITH EXCELLENT PERFORMANCE
ENVIRONMENTALLY FRIENDLY



SAP	Туре	Capacity Ah	Ampere (EN)	Polarity	Outside	dimension	s in mm	Hold-down
635218	DYNAMAX BLUELINE 35 ASIA L	35 Ah	300	1	187	127	226	B00
635219	DYNAMAX BLUELINE 45 ASIA L	45 Ah	330	1	238	129	225	B00
635220	DYNAMAX BLUELINE 60 ASIA L	60 Ah	540	1	232	175	225	B01
635221	DYNAMAX BLUELINE 70 ASIA L	70 Ah	600	1	260	173	225	B01
635222	DYNAMAX BLUELINE 100 ASIA L	100 Ah	720	1	303	175	225	B01
635223	DYNAMAX BLUELINE 35 ASIA P	35 Ah	300	0	187	127	226	B00
635224	DYNAMAX BLUELINE 45 ASIA P	45 Ah	330	0	238	129	225	B00
635225	DYNAMAX BLUELINE 60 ASIA P	60 Ah	540	0	232	175	225	B01
635226	DYNAMAX BLUELINE 70 ASIA P	70 Ah	600	0	260	173	225	B01
635227	DYNAMAX BLUELINE 100 ASIA P	100 Ah	720	0	303	175	225	B01



> QUALITY ADDITIVES FOR FUELS OR OIL SYSTEMS

Additives for diesel and gasoline will ensure smooth running of the engine, provide the necessary protection to all system elements and, as a bonus, can positively influence the car's starting properties. To protect the oil system, DYNAMAX has developed oil additives with the purpose of improve the quality of the used engine oil. In connection with the universal cleaner, the cleanliness of the oil system can be achieved without any service intervention.

DYNAMAX RADIATOR SYSTEM CLEANER



For use in all water-cooled cooling systems. Contains quick-reacting components for removal of operationally caused contamination. Dissolves and removes scale and improves the performance of valves, thermostats and water pumps.

DILUTION:

300 ML FOR 10 L OF COOLANT

DYNAMAX RADIATOR STOP LEAK



For use in all water-cooled cooling systems. Reliably seals critical hairline cracks and small leaks quick and easy. Also for preventive usage.

DILUTION

300 ML FOR 12 L OF COOLANT

DYNAMAX E10 GASOLINE ADDITIVE



Highly effective package of active substances that suppress the negative properties of gasoline E10 and E5 fuels with increased content of bio-components. Stabilizes the ethanol and binds water to itself, thus preventing the formation of condensation and corrosion in the fuel system and at the same time prolongs the life of the fuel itself.

DILUTION: 150 ML FOR 150 L OF GASOLINE

ART. NR. PACKAGING 503214 150ML

DYNAMAX GASOLINE SYSTEM CLEAN & PROTECT



Ensures effective cleaning of the entire fuel system from the tank to the combustion chamber. Removes operationally caused contamination and prevents formation of new deposits. Also improves cold starts in winter period.

DILUTION: 300 ML FOR 60 L OF GASOLINE

ART. NR. PACKAGINI 502251 300ML

DYNAMAX VALVE & INJECTOR CLEANER



Ensures effective cleaning of valves, injector nozzles and the inlet area without dismantling. Removes operationally caused contamination in the entire petrol injection system.

DILUTION: 300 ML FOR 60 L OF GASOLINE

ART. NR. PACKAGING 502252 300ML

DYNAMAX GASOLINE WINTER ADDITIVE



Used as a prevention of water deposition in the fuel system of the gasoline motor vehicles and subsequent prevention of ice micro-crystals formation. Thanks to its composition, it decreases corrosion and acidity caused by oxidation.

DILUTION: 300 ML FOR 60 L OF GASOLINE

ART. NR. PACKAGING 502832 300ML

ART, NR. PACKAGING

ART, NR. PACKAGING

300ML

502264

300ML

502263

DYNAMAX DIESEL SYSTEM CLEAN & PROTECT





Contains a selected combination of active substances for protection against wear. Deposits and residues of carbon, oil and soot are properly dissolved and dispersed. Ensures lasting lubrication of the injection pump and all moving parts. Also suitable for high pressure systems with direct injections and Common rail system.

ART. NR. PACKAGING 502257 300ML

DILUTION: 300 ML FOR 80 L OF DIESEL

DYNAMAX DIESEL BACTERICIDE



Suitable for use in all diesel aggregates and diesel storage tanks. High-performance concentrate with a wide action spectrum for removing and preventive against bacteria, fungi and yeasts in equipment that is out of service for a longer period.

DILUTION: 150 ML FOR 150 L OF DIESEL

ART. NR. PACKAGIN 502259 150ML

DYNAMAX ALL-SEASON DIESEL ADDITIVE





Provides improved flow properties of all diesel fuels and is suitable for use all diesel engines with or without DPF. Protects, cleans and lubricates the entire fuel system. Prevents corrosion. Suppresses the negative impact of bio-ingredients. Increasing the cetane number, reduces fuel consumption and improves cold start.

DILUTION: 500 ML FOR 500 L OF DIESEL

ART. NR. PACKAGING 500070 500ML

DYNAMAX HYDRAULIC LIFTER CARE





Additive whch reduces wear and tear of hydraulic lifters and eliminates unpleasant "rattling" noises. Cleans the hydraulic valve lifters, ensures optimal function and improves cold starting characteristics.

DILUTION: 300 ML FOR 6 L OF OIL

ART. NR. PACKAGING

300ML

501546

DYNAMAX ENGINE OIL STOP-LEAK ADDITIVE





Engine oil leak additive with a high-quality ingredient that prevents oil loss due to hardened and worn seals without dismantling the engine. Effectively regenerates, softens hardened and worn seals e.g. shaft seals, valve shaft seals, etc. and thus ensures the tightness of the engine. Regulates the viscosity range of the engine oil and minimizes engine noise.

DILUTION: 300 ML FOR 6 L OF OIL

ART. NR. PACKAGING 503215 300ML

DYNAMAX OIL SYSTEM CLEANER





Effective formula that dissolves varnish and sludge deposits from the oil system which restores compression of piston rings. Cleans valves, reduces engine noise and improves combustion efficiency.

DILUTION: 300 ML FOR 6 L OF OIL

ART. NR. PACKAGING 501547 300ML



> REGULAR MAINTENANCE AND CARE OF GARDEN EQUIPMENT

Take care of flawless cleanliness with minimal effort. Effective cleaners easily handle grease, wax and insect residue and provide long-lasting protection. The effects have been verified by a number of satisfied motorists. High-quality DYNAMAX cosmetics and technical sprays handle the regular maintenance of your garden equipment carefully and playfully. Effective and affordable oils, sprays, waxes, gels and pastes will even take care of clean tires, carburetor or brakes of any car.

DYNAMAX DXT4 MULTISPRAY



High-quality multi-purpose spray with 360° disperser. Effectively lubricates, relieves, prevents corrosion and protects all types of mechanical car parts. Recommended for use in workshops, for house hold use, for garden equipment, car service stations and thanks to its resistance to high temperatures it is also suitable for industrial machinery.

ART. NR. PACKAGING 610112 400ML

UNIVERSAL APPLICATION

DYNAMAX DXC1 BRAKE CLEANER





Brake cleaner with high dissolving properties that cleans and degreases brakes, clutch, transmission and engine parts. Product is non-corrosive, non-conductive and streakfree. Formula dries quickly and leaves no residue.

ART. NR. PACKAGING 606141 500ML

ACTIVE CLEANER

DYNAMAX DXC10 CARBURETTOR CLEANER





High effective cleaner for carburettors. Aplly on visible carburettor parts (air passages, adiusting screws, venturi, outside parts), throttle valve, choke and on the positive crank case ventilation valve. High dissolving properties. Leaves no residue. Non-corrosive. Allow engine to cool down and remove air filter.

REMOVES ALL DEPOSITS

611511

DYNAMAX DXM3 MOTOR CLEANER





Universal cleaner that removes greasy dirt from car engine, car chassis, tools, floors and other heavily soiled parts and surfaces. Also suitable to refill multipurpose degreasing devices. Usage: Apply undiluted cleaner on to the dirty surface with a brush or spray. Leave for 5-10 minutes and then rinse with water.

ART, NR. PACKAGING 500513 500520 3.4L

ACTIVE CLEANER

DYNAMAX DXT7 START SPRAY





A tool for starting problems with internal combustion engines. The safe cold starting of all engines is made possible by a special combination of ingredients. Ideal at low temperatures, in damp weather or after longer engine downtimes. The spray protects both the engine and the battery. Fast-acting. Ether-based.

HIGH EFFICIENCY

ART. NR. PACKAGING 611510

ART. NR. PACKAGING

606144

DYNAMAX DXT3 CONTACT SPRAY





Electronic contact cleaner spray that repels moisture. Water repellent. Effective penetration. Usage: Keep and use at room temperature. Shake before use. Apply sufficient amount of the cleaner on the surface and let it dry. Leaves a transparent protective film after evaporation.

EXCELLENT CONDUCTIVE PROPERTIES



DYNAMAX DXT14 COPPER SPRAY





Spray with a high copper content to lubricate screw connections which are exposed to very high temperatures. High thermal stability. Prevents wear and sticking. Resistant to chemicals and weather influences. Rust preventive. Shake before use. The specific lubrication properties is achieved after evaporation of the solvent [approximately 1 minute].

ART. NR. PACKAGING 634911 500ML

FROM -40 °C UP TO 1100 °C

DYNAMAX DXT2 SILICON SPRAY





Silicon spray that lubricates and protects plastic, metal or rubber parts. Prevents creaking, squeaking, corrosion, freezing and drying out. The product is water repellent and has outstanding mechanical and thermal stability. Usage: Shake before use. Optimum lubrication is gained after the evaporation of the solvent.

ART. NR. PACKAGING 606143 400L

EFFECTIVE LUBRICANT

DYNAMAX MOTOFORCE CHAIN LUBE





High performance lubricant designed and tested in the racing environment of road and off-road motorcycles. High viscous lubricant for chains of motorcycles. Cleans, lubricates, extends life and protectsall types of roller chains, gears and cables that operate under exposed conditions. Protects against water and dust.

ART. NR. PACKAGING 610114 400ML

EXTRA GRIP

DYNAMAX MOTOFORCE CHAIN CLEANER





High effective cleaner for chains and gear wheels. Quickly andeasily cleans chains from dirt, dust and oil. Optimum cleansing effect due to the combination of gel structure, the emulsifying properties and the slow evaporation rate. Removes grease and oil. High dissolving properties. The aerosol should have room temperature.

ART. NR. PACKAGING 611512 400ML

EXCELLENT ANTICORROSIVE EFFEKT

DYNAMAX DXG1 GLASS CLEANER





Glass and mirror cleaner that efficiently removes grease, smog, nicotine, insect remains and wax. Thanks to higher amount of alcohol leaves a perfect streak-free shine on the glass. Usage: Apply it evenly on any type of glass or mirror and then wipe it until it's dry with a dry cloth or tissue paper.

ANTISTATIC EFFECT

ART. NR. PACKAGING 501521 500ML [R] 606135 500ML [S]

DYNAMAX DXE2 CAR SHAMPOO AND WAX





Car Shampoo with protective wax suitable for all types of car paints including metallic paint finish. Leaves the surface clean with a particularly high gloss and is gentle to the car paint and plastic parts. Usage: Dilute with water 1:200.

PACKAGING
1L
10KG
25KG

HIGH POLISHING EFFECT

DYNAMAX DXC6 UNIVERSAL EXTERNAL CLEANER



Highly concentrated alkaline product ideal for any type of vehicle. It is a two-component mixture of the highest quality suitable for cleaning and degreasing all kinds of dirt from the car bodies, canvas, chassis or wheels. Can be also used for cleaning heavily soiled floors in car services and repair shops.

ART. NR.	PACKAGING
501548	5L
501549	10KG
501550	25KG

ACTIVE CLEANING

DYNAMAX DXC9 INDUSTRIAL HAND CLEANER





Powerful hand cleaner for removing industrial soiling. Solvent-free formula. Rapidly emulsifies with all types of soiling to ensure effective cleaning. Cleans and moisturises the hands and prevents skin irritation. Formulated with pleasant fresh fragrance.

REMOVES HEAVY DIRT

ART. NR.	PACKAGIN
611492	3,8L



> GUARANTEE OF SAFE OPERATION WITH BRAKE FLUIDS

DYNAMAX brake fluids specially developed with an emphasis on corrosion protection of individual components of the brake system and associated life extension, belong to the equipment of every prudent motorist. Thanks to its unique composition, DYNAMAX brings to the market brake fluids for brake hydraulic systems, clutch systems and ABS, EDS and ESP systems that do not damage metal or rubber.

DYNAMAX 240 DOT3





Brake fluid designed as a refill for all brake, clutch and other hydraulic systems and mechanisms. Intended for operation in the temperature range -50 °C up to 240 °C.

APPROVAL: FM SAFETY STANDARD 116 DOT 3; SAE J 1703; ISO 4925

ART. NR.	PACKAGING
500045	500ML
500046	4L

DYNAMAX 265 DOT4





Developed for use in brake, hydraulic and clutch systems in the temperature range of -50C up to 260C. Liquid of high quality ensures safe and precise braking, does not harm the rubber and metal parts. Designed for use in disc and drum brakes. Also suitable for brakes with ABS system.

APPROVAL: FM SAFETY STANDARD 116 DOT 4; SAE J 1703; ISO 4925; VW TL 766

ART. NR.	PACKAGING
501890	500ML
5000/10	/11


EVERYTHING FOR FARMERS

Wide assortment so that you don't miss anything

> IN OUR OFFER YOU WILL FIND A "MUST" RANGE WHICH MUST NOT BE MISSED FOR ANY PROPER, HOBBY OR PROFESSIONAL FARMER

Agricultural machinery and equipment require high-quality engine oils that will provide support for the expended power and long durability of the engine and the entire mechanism. DYNAMAX engine oils for agricultural machinery are composed of carefully selected components and represent the answer to the question of how to choose a suitable engine oil for a tractor, harvester or other agricultural machine.



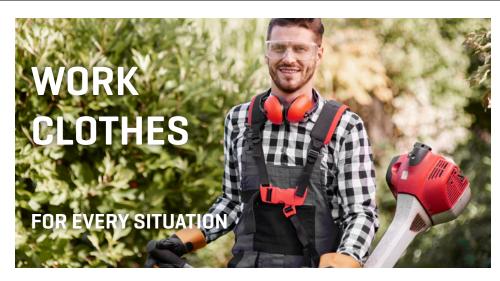

> WORK CLOTHING CREATED FOR THE NEEDS OF A GARDENER

Wide range of DYNAMAX work clothes, as if tailored for the needs of a real gardeners body and soul. Durable materials that do not lose quality or safety. Suitable for a wide variety of conditions that your garden can offer.

DYNAMAX WORK CLOTHES



- high quality material and sewing
- functional and practical design
- special the material that repels water, dust and technical liquids
- high quality, embroidered DYNAMAX branding

ART. NR.	PACKAGING
602013	S
602012	М
601990	L
602220	XL
602221	XXL
602083	3XL

DYNAMAX WORK T-SHIRT



- high quality material and sewing
- functional work t-shirt
- · high quality, printed DYNAMAX branding

ART. NR.	PACKAGING
636182	S
636183	М
636184	L
636185	XL
636186	XXL
636187	3XL

DYNAMAX WORK SWEATSHIRT



- comfortable sweatshirt with a unique dynamax logo design in "outline" style
- high quality material and sewing
- weight min. 280g 80% cotton and 20% polyester

ART. NR.	PACKAGIN
603507	S
635981	М
635982	L
635983	XL
635984	XXI

DYNAMAX WORK VEST



- high quality material and sewing
- functional and practical design
- special the material that repels water, dust and technical liquids
- high quality, embroidered DYNAMAX branding

ART. NR.	PACKAGING
636165	S
636166	М
636167	L
636168	XL
636169	XXL

SAFETY GOGGLES



- transparent safety goggles with six ventilation holes on each side
- certified, polycarbonate material

ART. NR. PACKAGING	VT_7361	LIMI
	ART. NR.	PACKAGING

SAFETY GLOVES



- leather imitation work gloves
- ideal use on construction site, garage, garden, warehouse and in the workshop
- universal men's size

ART. NR. PACKAGIN 1010017 UNI



FUEL CANISTER



- volume of 5L
- first-class manufacturing quality, which prevents the degradation of the plastic composition in demanding conditions
- withstands sunlight and frost
- includes canister and practical funnel for better handling

ART. NR. PACKAGING 91500P 5L

HAND WHISK



- whisk for coarse dirt and dust particles
- wooden design, soft bristles with an antistatic surface
- available in different colors

ART. NR. PACKAGING 146.3005 150 mm

DYNAMAX, s.r.o. Alekšince 231, 951 22 Alekšince Slovakia, EU

EVERYTHING FOR GARDEN EQUIPMENT

DYNAMAX has created a series of oils that make maintenance and trouble-free operation of garden equipment simple and affordable for everyone. Engine oil for four-stroke or two-stroke engines for garden machines, adhesive oil for chainsaws against jamming, and finally engine oil suitable for motorcycles, boat engines and snowmobiles. Get to know the wide range of DYNAMAX oils for garden equipment.

